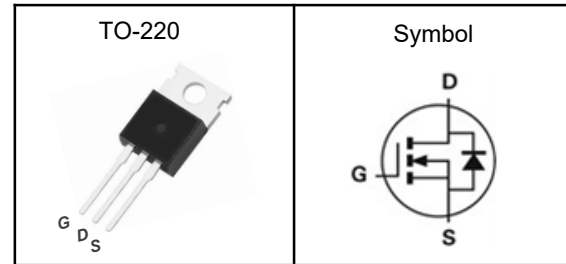


N-Channel Enhancement Mode MOSFET
Features

- Fast switching speed
- Reliable and Rugged
- ROHS Compliant & Halogen-Free

Applications

- Power Management in Desktop Computer
- DC/DC Converters

Pin Description


V_{DSS}	150	V
$R_{DS(ON)-Typ}$	4.8	m Ω
I_D	150	A

Absolute Maximum Ratings ($T_J=25^\circ\text{C}$, Unless Otherwise Noted)

Symbol	Parameter	Rating	Unit
V_{DSS}	Drain-Source Voltage	150	V
V_{GSS}	Gate-Source Voltage	± 20	V
T_J	Maximum Junction Temperature	-55 to 150	$^\circ\text{C}$
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
E_{AS}	Single Pulse Avalanche Energy	1600	mJ
$I_{DM}^{①}$	Pulse Drain Current Tested	560	A
I_D	Continuous Drain Current	$T_C=25^\circ\text{C}$	A
	Continuous Drain Current	$T_C=100^\circ\text{C}$	A
P_D	Maximum Power Dissipation	$T_C=25^\circ\text{C}$	W

Thermal Characteristics

Symbol	Parameter	Rating	Unit
$R_{\theta JA}^{③}$	Thermal Resistance-Junction to Ambient	62	$^\circ\text{C/W}$
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	0.45	$^\circ\text{C/W}$

Note ① : Max. current is limited by bonding wire.

Note ② : UIS tested and pulse width are limited by maximum junction temperature 150°C .

Note ③ : Surface Mounted on 1in^2 FR-4 board with 1oz.



N-Channel Enhancement Mode MOSFET

Electrical Characteristics ($T_J=25^{\circ}\text{C}$, Unless Otherwise Noted)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Static Electrical Characteristics						
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	150	---	---	V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=150V, V_{GS}=0V$	---	---	1	μA
		$V_{DS}=150V, V_{GS}=0V, T_J=125^{\circ}\text{C}$	---	---	100	μA
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu A$	2.0	---	4.0	V
I_{GSS}	Gate Leakage Current	$V_{GS}=\pm 20V, V_{DS}=0V$	---	---	± 100	nA
$R_{DS(on)}$	Drain-Source On-state Resistance	$V_{GS}=10V, I_D=40A$	---	4.8	6.2	m Ω
Dynamic Characteristics ^⑤						
C_{iss}	Input Capacitance	$V_{GS}=0V, V_{DS}=75V, \text{Freq.}=1.0\text{MHz}$	---	10151	---	pF
C_{oss}	Output Capacitance		---	38	---	
C_{riss}	Reverse Transfer Capacitance		---	663	---	
$T_{d(on)}$	Turn-on Delay Time	$V_{GS}=10V, V_{DD}=75V, I_D=40A, R_G=3\Omega$	---	38.6	---	nS
T_r	Turn-on Rise Time		---	18	---	
$T_{d(off)}$	Turn-off Delay Time		---	70	---	
T_f	Turn-off Fall Time		---	21	---	
Q_g	Total Gate Charge	$V_{GS}=10V, V_{DD}=75V, I_D=20A$	---	141	---	nC
Q_{gs}	Gate-Source Charge		---	41	---	
Q_{gd}	Gate-Drain Charge		---	30	---	
Source-Drain Characteristics						
I_S	Continuous Source Current		--	---	150	A
V_{SD}	Diode Forward Voltage	$I_S=80A, V_{GS}=0V$	---	---	1.2	V
t_{rr}	Reverse recovery time	$I_F=40A, diF/dt=100A/\mu s$	---	159	---	ns
Q_{rr}	Reverse recovery charge		---	423	---	nC

Note ④: Pulse test (pulse width $\leq 300\mu s$, duty cycles $\leq 2\%$).

Note ⑤: Guaranteed by design, not subject to production testing.



N-Channel Enhancement Mode MOSFET

Typical Characteristics

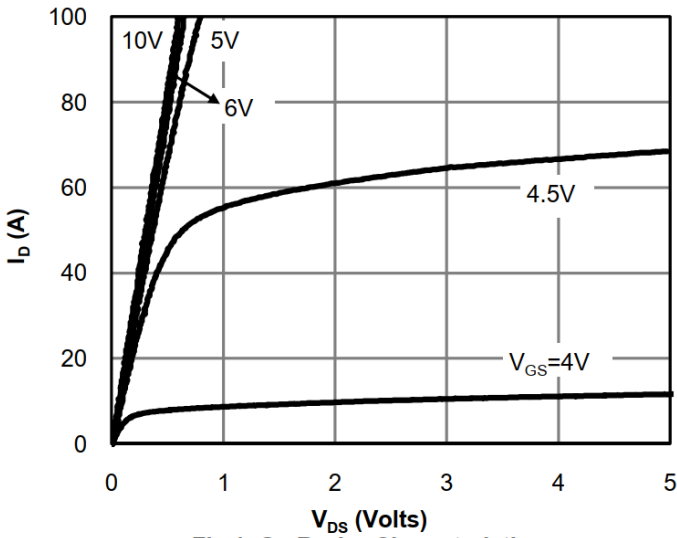


Fig 1: On-Region Characteristics

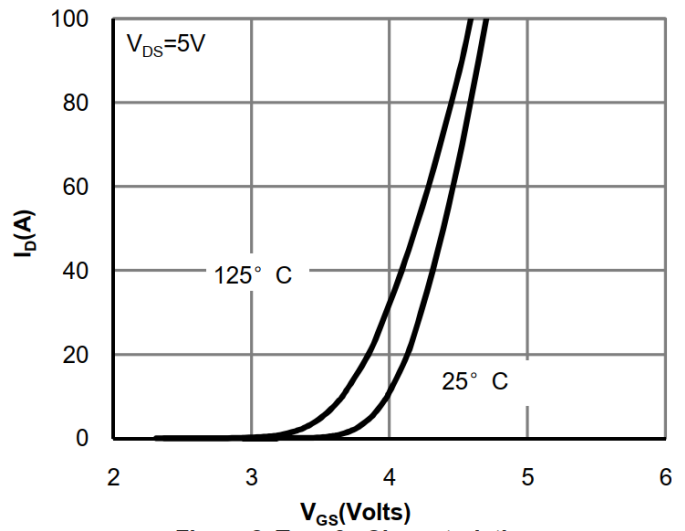


Figure 2: Transfer Characteristics

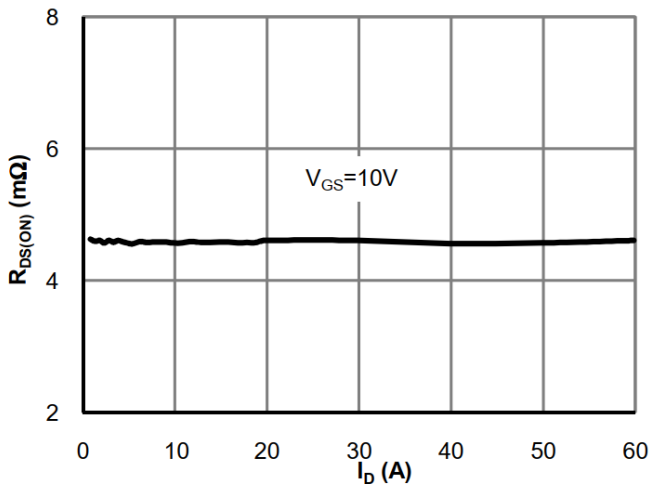


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

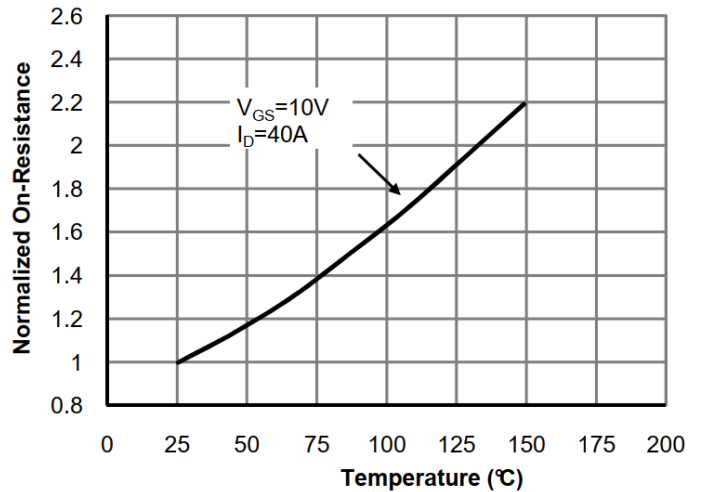


Figure 4: On-Resistance vs. Junction Temperature

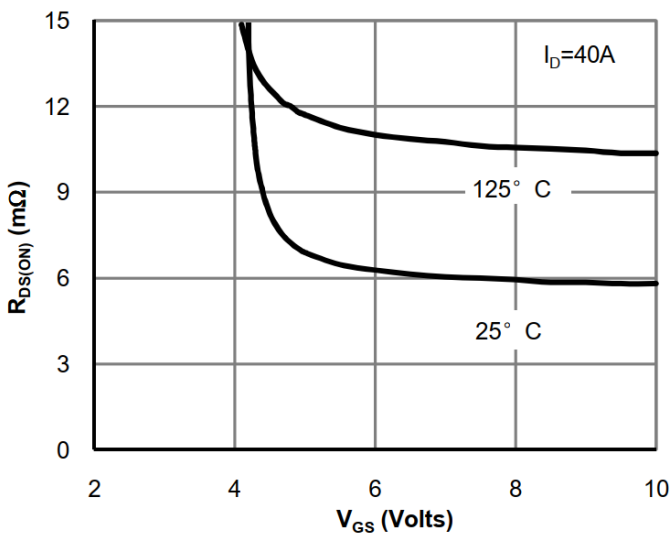


Figure 5: On-Resistance vs. Gate-Source Voltage

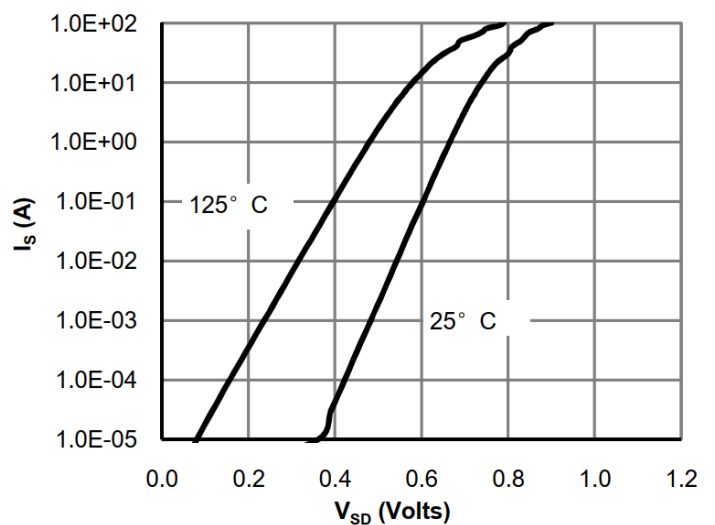


Figure 6: Body-Diode Characteristics

N-Channel Enhancement Mode MOSFET

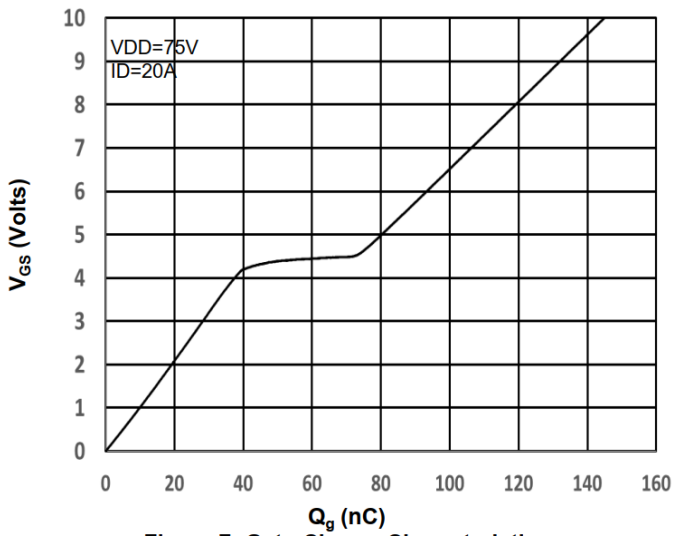


Figure 7: Gate-Charge Characteristics

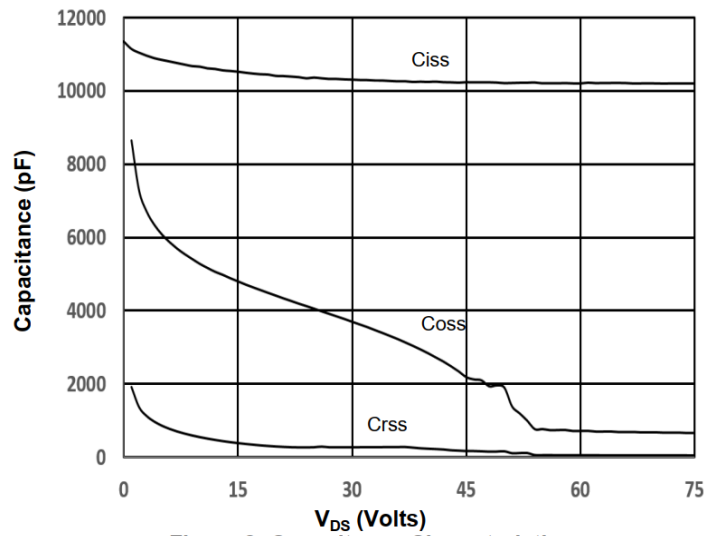


Figure 8: Capacitance Characteristics

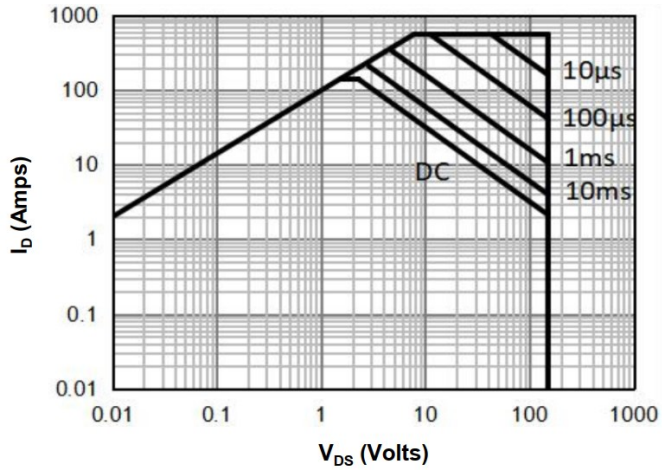
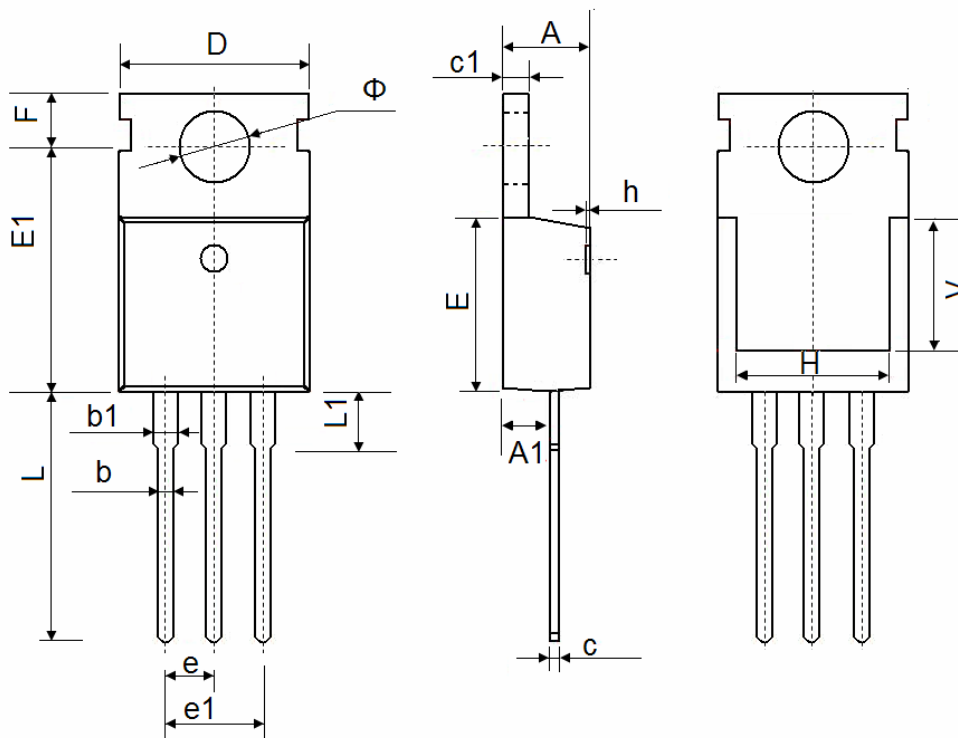


Figure 9: Maximum Forward Biased Safe Operating Area

N-Channel Enhancement Mode MOSFET
TO-220 Package Outline Data


Symbol	Dimensions In Millimeters	
	Min.	Max.
A	4.350	4.650
A1	2.250	2.550
b	0.710	0.910
b1	1.170	1.400
c	0.330	0.650
c1	1.200	1.400
D	9.910	10.250
E	8.9500	9.750
E1	12.650	12.950
e	2.540 TYP.	
e1	4.980	5.180
F	2.650	2.950
H	7.900	8.100
h	0.000	0.300
L	12.700	13.500
L1	2.850	3.250
V	7.500 REF.	
Φ	3.400	3.800